


WALLMOUNT ELECTRIC FIREPLACE



Specifications

Model	BTU	Width	Height	Depth	Viewing Area
CEFL32FH-1	5,000	32	21 5/8	4 15/16	12 X 22 9/16
CEFL42FH-1		42			12 X 32 9/16
CEFL50FH-1		50			12 X 40 9/16
CEFL60FH-1		60			12 X 50 1/2
CEFL72FH-1		72			12 X 62 9/16
CEFL100FH-1		100			12 X 90 9/16

Dimensions

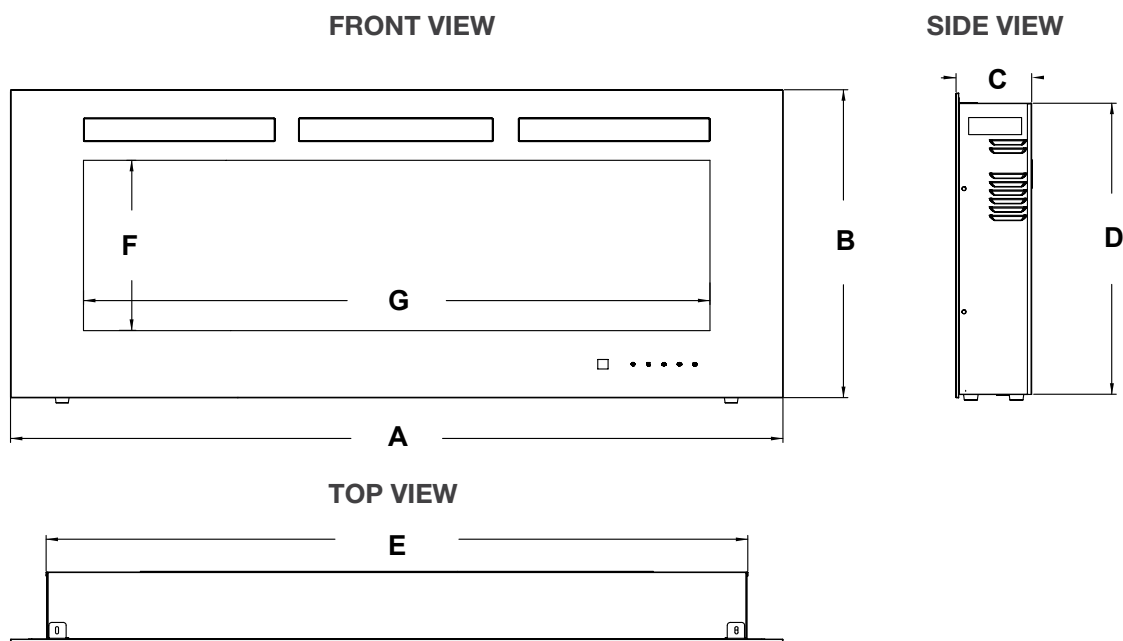

	A	B	C	D	E	F	G
CEFL32FH-1	32" (813mm)	21 5/8" (550mm)	4 15/16" (125mm)	20 1/2" (520mm)	27 5/16" (695mm)	12" (304mm)	22 9/16" (573mm)
CEFL42FH-1	42" (1067mm)				37 1/2" (951mm)		32 9/16" (827mm)
CEFL50FH-1	50" (1270mm)				45 7/16" (1154mm)		40 9/16" (1030mm)
CEFL60FH-1	60" (1524mm)				55 5/16" (1405mm)		50 1/2" (1284mm)
CEFL72FH-1	72" (1830mm)				67 3/8" (1711mm)		62 9/16" (1590mm)
CEFL100FH-1	100" (2540mm)				95 3/8" (2422mm)		90 9/16" (2300mm)

Product information provided is not complete and is subject to change without notice. Please consult the installation manual for the most up to date installation information.

W415-3043 / 05.05.21

WALLMOUNT ELECTRIC FIREPLACE

Minimum Clearance to Combustibles


Measurements are taken from the glass front	
Bottom	0"
Sides	0"
Back	0"
Top	8" (20.3cm) to ceiling / mantel

Measurements are taken from the body	
Sides, back, and top	0"


Minimum Mantel Clearances

WARNING

- When using paint or lacquer to finish a mantel, the paint or lacquer must be heat resistant to prevent discoloration.

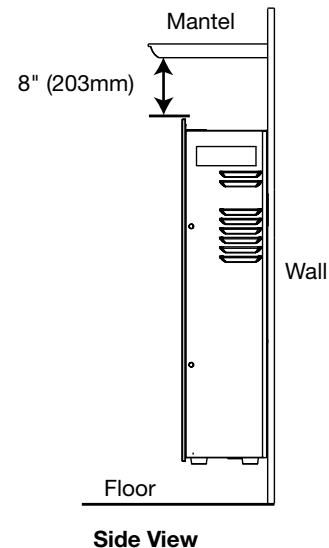

Framing

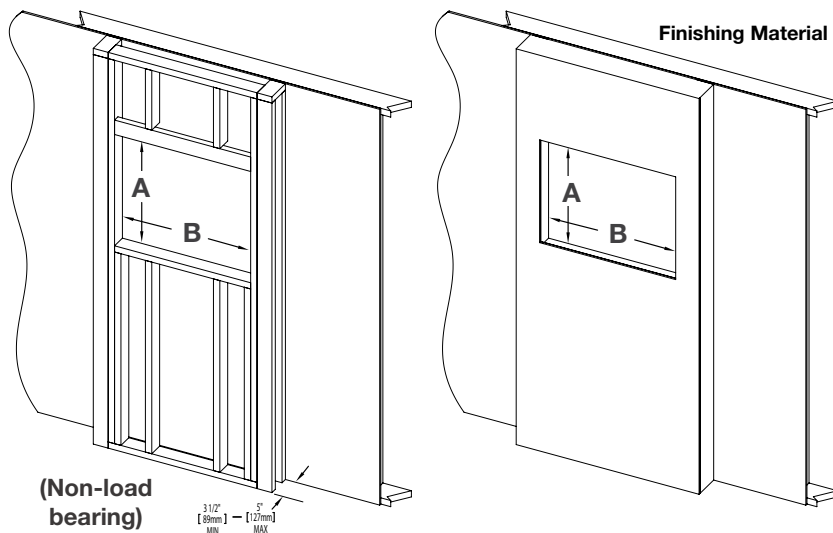


MODEL NO.	A	B
CEFL32FH-1	21" (53.5cm)	27 13/16" (70.7cm)
CEFL42FH-1		38" (96.5cm)
CEFL50FH-1		45 15/16" (116.6cm)
CEFL60FH-1		55 13/16" (141.8cm)
CEFL72FH-1		67 7/8" (172.5cm)
CEFL100FH-1		95 7/8" (243.5cm)

Spécifications

Modèle	BTU	Largeur	Hauteur	Profondeur	Dimensions de Vision
CEFL32FH-1	5 000	32	21 5/8	4 15/16	12 X 22 9/16
CEFL42FH-1		42			12 X 32 9/16
CEFL50FH-1		50			12 X 40 9/16
CEFL60FH-1		60			12 X 50 1/2
CEFL72FH-1		72			12 X 62 9/16
CEFL100FH-1		100			12 X 90 9/16

Dimensions

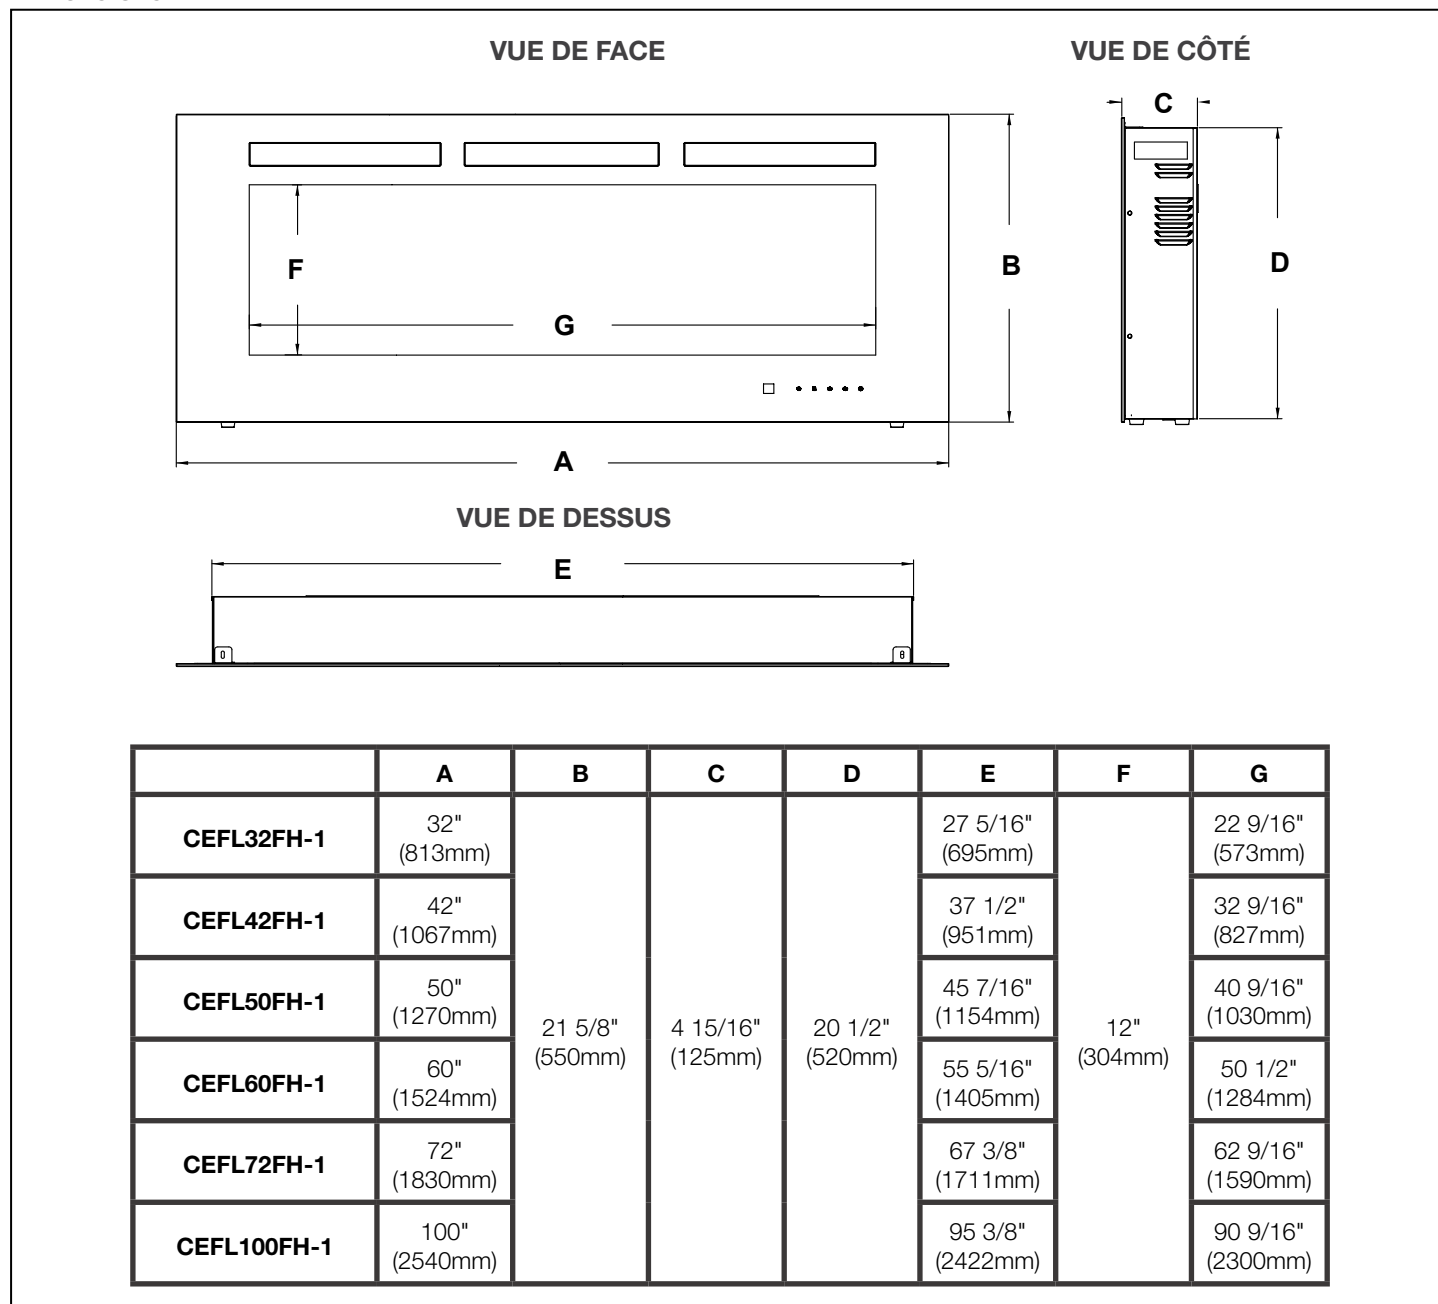

Information du produit fourni n'est pas complet et est sujet de changer sans préavis. Consultez le manuel d'installation pour information d'installation actuel.

Dégagements Minimaux aux Combustibles

Les mesures sont prises à partir de la façade vitrée

Bas	0"
Côtés	0"
Arrière	0"
Dessus	8" (20,3cm) au plafond / à la tablette


Les mesures sont prises du corps

Côtés, arrière, et dessus	0"
------------------------------	----


Dégagements Minimaux de la Tablette

! AVERTISSEMENT

- Lors de l'utilisation de la peinture ou laque pour la finition de la tablette, la peinture ou laque doivent être résistants à la chaleur pour empêcher la décoloration.

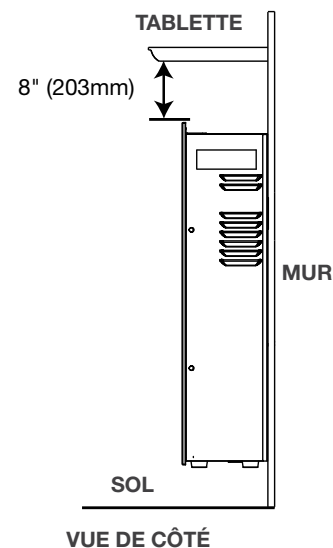

Ossature

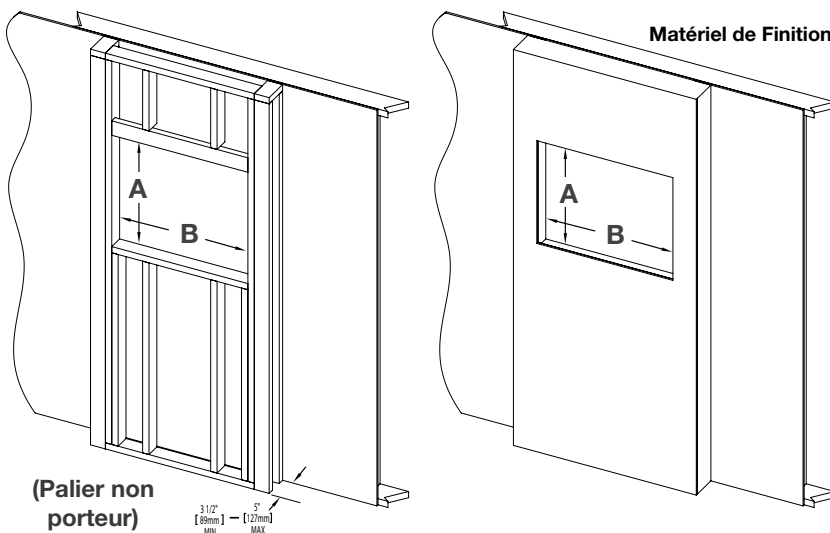

No. de Modèle	A	B
CEFL32FH-1	21" (53,5cm)	27 13/16" (70,7cm)
CEFL42FH-1		38" (96,5cm)
CEFL50FH-1		45 15/16" (116,6cm)
CEFL60FH-1		55 13/16" (141,8cm)
CEFL72FH-1		67 7/8" (172,5cm)
CEFL100FH-1		95 7/8" (243,5cm)